Electrolux

Warewashing
Small Single Skin Glasswasher with Drain Pump and Detergent Dispenser, 1 cycle, 30b/h, UK plug

ITEM #

MODEL #

NAME #

SIS #

AIA #



402082 (EGWSGUK) Glasswasher (small), single skin, with drain pump and detergent dispenser, 1 cycle, 30b/h - Uk

Short Form Specification

Item No.

Unit shall be Glasswasher type hot water rinsing for rack dimension of 400*400mm. Electrical charasteristics to be 230 single phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arms. Double skinned counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash arm and rinse arms. The unit shall include drain pump, detergent and rinse aid dispenser pump and be equipped with electric cable with UK plug.

APPROVAL:

Main Features

- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82° C for sanitizing rinse. No external booster is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.
- Equipped with single phase electrical cable and UK plug for easy and fast installation.
- Easy service access to main components without moving the unit.
- Flexible rack support suitable to use rack dimension from 350x350mm up to 380x380mm.

Construction

- Robust structure thanks to stainless steel construction.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Detergent dispenser for easy connection to the external detergent source.
- Unit to feature rinse aid dispenser pump.
- Requires only 1 phase 230V supply.
- Completely closed on the back by a cover plate.
- Internal components (arms and filter) are easy extractable.

Included Accessories

- 1 of SQUARE BASKET FOR GLASSES 400x400x150MM PNC 864470
- 1 of Insert for 12 saucers, 290x290x75mm PNC 867048
- 1 of Square cutlery container, 89x113x113mm PNC 867049

Optional Accessories

- Square basket for glasses, 400x400x1100mm PNC 867039 ❑
- Round basket for glasses, 400x180mm PNC 867047 ❑
- Square basket with angles for glasses 400x400x150 PNC 867067 ❑
- INCLINATION INSERT FOR GLASSES 400x400MM PNC 867069 ❑


Electrolux

Warewashing
Small Single Skin Glasswasher with Drain Pump and Detergent Dispenser, 1 cycle, 30b/h, UK plug


Electrolux

Warewashing
Small Single Skin Glasswasher with Drain Pump and Detergent Dispenser, 1 cycle, 30b/h, UK plug

Front

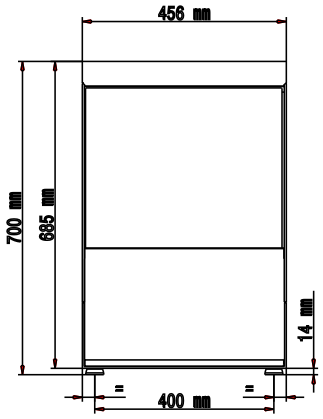


Side

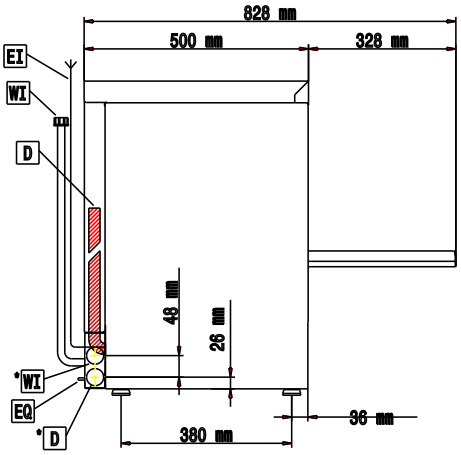

CWI1	=	Cold Water inlet	XD	=	Detergent connection
D	=	Drain	XR	=	Rinse aid connection
EI	=	Electrical connection			
EO	=	Electrical Outlet			
V	=	Air vents			
WI	=	Water inlet			

Top

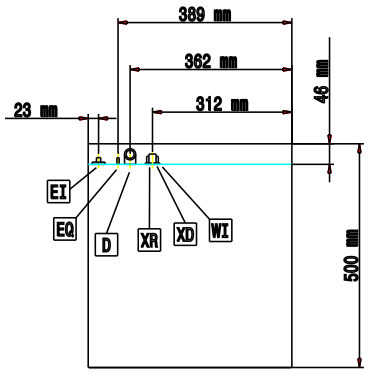

Electric

Supply voltage:	
402082 (EGWSGUK)	230 V/1N ph/50 Hz
Total Watts:	2.7 kW
Boiler heating elements:	
Tank heating elements:	2 kW
Wash pump size:	

Water

Pressure, bar min/max:	2-5 bar
Water supply temperature:	10-65 °C
Boiler Capacity (lt):	2.5
Incoming water line size:	3/4"
Washing cycle tank capacity (lt):	16
Hot rinse cycle water consumption (lt):	2

Key Information

Baskets per hour:	30
N° of working cycles - sec.:	1 (120)
Cell dimensions - width	400 mm
Cell dimensions - depth	400 mm
Cell dimensions - height	290 mm
External dimensions, Width	456 mm
External dimensions, Height	700 mm
External dimensions, Depth	495 mm
Shipping weight:	40 kg
Shipping height:	850 mm
Shipping width:	620 mm
Shipping depth:	590 mm
Shipping volume:	0.31 m³
Noise level:	61 dBA
Washing cycle temperature:	60 °C
Hot rinse cycle temperature:	82 °C

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2018.05.02